


## HK Series, Screw connection, 4 pin, Male insert

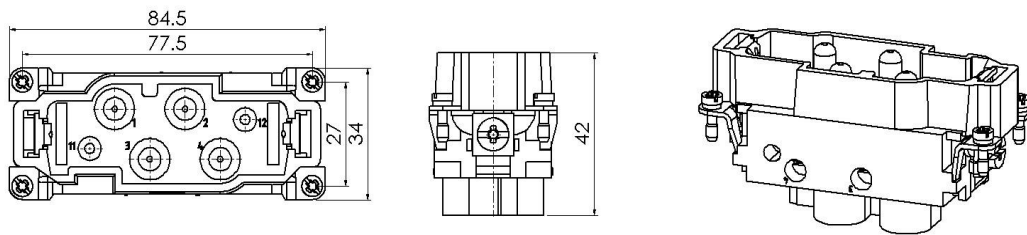

Typecode     **HK-004/0-M**  
ID                **1 007 03 0000099**

### Technical Data

#### Product Properties

|                                     |                                  |
|-------------------------------------|----------------------------------|
| Series                              | HK                               |
| Mating with                         | H16B                             |
| Connection mode                     | Screw connection                 |
| Gender                              | Male                             |
| Rated voltage                       | 830 V                            |
| Rated current                       | 80 A                             |
| Rated impulse voltage               | 8 kV                             |
| Number of pins                      | 4                                |
| Core cross-section/Clamping ability | 1.5~ 16 mm <sup>2</sup> / 10 AWG |
| Grounding conductor                 | Yes                              |
| Pollution degree                    | 3                                |
| Insulation resistance               | $\geq 10^{10} \Omega$            |
| Temperature range                   | -40 °C ~ +125 °C                 |
| Standard                            | EN 60664-1, IEC 61984            |

#### Insert

|          |                 |
|----------|-----------------|
| Material | PC              |
| Colour   | Gray (RAL 7032) |

#### Commercial data

|                   |          |
|-------------------|----------|
| Weight            | 0.113 kg |
| Packaging unit    | 5 pcs    |
| Country of origin | CN       |

### Features

- High quality engineering plastics
- Screw connection
- $\geq 500$  Mating cycles
- Approval: CE, UL
- RoHS-compliant

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。