


Size 10B HPR, Surface mounted housing

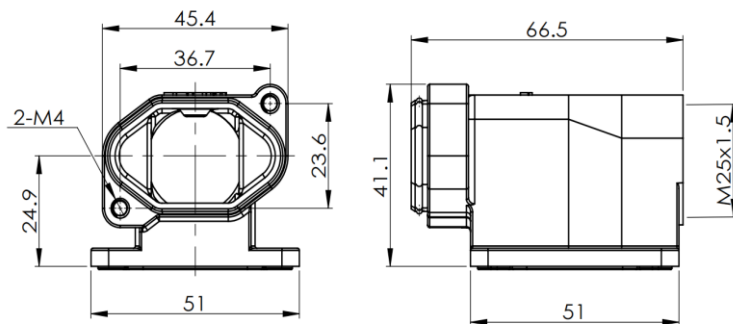

Typecode HPR3A-SMSL-2B-M25
ID 1 007 11 0000007

Technical Data

Product Properties

Series	Size 3A
Mating with	HA-003, HA-004, HD-008, HQ-005 HQ-007, HQ-012
Housing type	Surface mounted housing
Cable outlets direction	Top entry
Cable outlets	M25 x 1.5
Locking type	Screw
Installation mode	Surface fixed installation
Protection Class	IP68
Impact strength	IK08
Temperature range	-40 °C ... 125 °C
Standard	DIN EN 175301-801

Insert

Housing material	Die-casting zinc alloy
Color	Black (RAL 9005)


Commercial data

Weight	206 g
Packaging unit	1 pc
Country of origin	CN

Features

- Die-casting zinc alloy
- Top entry
- Surface fixed installation
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

Installation Size

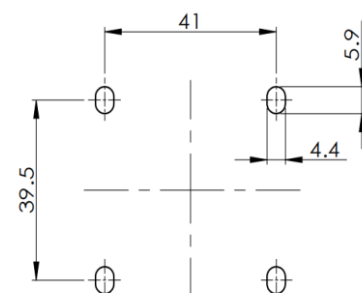

*The design data are listed here, and the changes to the product are not described here. For unfinished matters, please contact customer service. It is the user's responsibility to verify functionality, compliance with applicable laws and instructions, and electrical safety in specific applications.